

SELF REGULATING HEATING CABLE

TRACECO a reliable solution to all your problems of protection against ice and maintaining domestic hot water temperature.


SURFACE TEMPERATURE MAXIMUM

Un-energized: 80°C
 Energized: 65°C

TECHNICAL DATA

Supply voltage: 230V single phase AC

Product	Power/m	Size	Max length
TRACECO-10	10W/m at 10°C	4,9x13mm	200m
TRACECO-20	20W/m at 10°C	4,9x13mm	155m
TRACECO-30	30W/m at 10°C	5,3x15,6mm	120m
TRACECO-40	40W/m at 10°C	5,3x15,6mm	100m

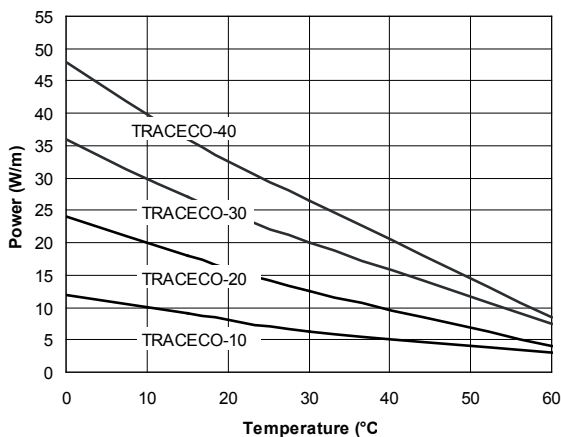

ADVANTAGES

- Can be cut to length on site
- Stored on reels
- Variable power preventing any overheating
- U.V. protected with Santoprene® over jacket


APPROVAL

- CSTB: 14/00-597*01 EXT
- LCIE: ATEX 6204X
- FIMKO: FI 17718
- Gost: POCC FR.AIO64.B15283
- EX II 2G/D
- Temperature classification: T6 / 80°C
- Maximum surface temperature "T"(*)



OTHERS

Can be used with the DOMOCLICK fast connection system. NON ATEX.

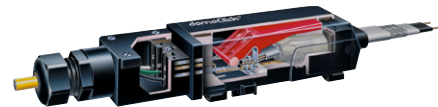

(*) Established according to EN62086-1 clause 5.1.11.3 and IEC 60079-30-1 clause 5.1.13.3, exposing the cable for fault conditions such as exceeding the maximum operation temperature, in power "on" condition, declared by the manufacturer.